


# SMARTLOCK – DOOR ACCESS CONTROL

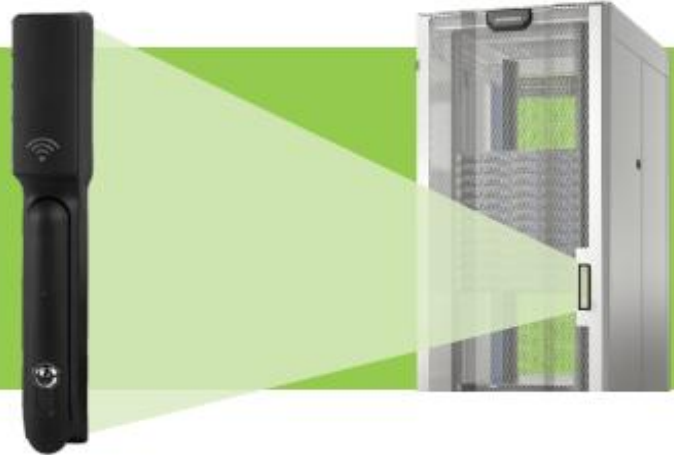

## SmartLock Solution Components

	Sensor Family/Technology	Part Number		Package Description
SmartLock Accessories	Intelligent Door Sensor	DX2-DH2C2		Two active dry contacts powered by 12V to support 3rd party door locks. Two digital Normally Closed (NC) or Normally Open (NO) contact closures. Dual RJ-45 connectors
	Digital Proximity Sensor	DX-PIR		Digital proximity sensor that detects motion around a cabinet, RJ-45 connector. Range: 16ft (5m), +/- 47 degrees horizontal, +/- 41 degrees vertical
	Intelligent WEBCAM	Ask your Sales Contact		Ask your Raritan Contact about compatible WEBCAMS to the SmartLock Solution
	Door Position Sensor	Ask your Sales Contact		2-wire door position sensor detecting the state of the rack door position (Open, Closed).
SmartLock BASIC	Basic Handle	(Single Handle) SML-SCO-H3EM-60 (Kit) SML-KIT-SCO-60-2D	(Single Handle) EMKA Handle E (Kit) SML-KIT-01	Electronic Swinghandles -High security DIN lock
SmartLock STANDARD	Single-Low Frequency Reader	(Single Handle) SML-SCO-H3EM-68 (Kit) SML-KIT-SCO-68-2D (Kit) SML-KIT-SCO-68-1D		Southco Electronic Swinghandle and RFID Card Reader - 125 kHz Prox card reader - supports HID 125 kHz Prox card types - Wiegand Output protocol
	Single- High Frequency Reader	(Single Handle) SML-SCO-H3EM-66 or 67 (Kit) SML-KIT-SCO-66-2D (Kit) SML-KIT-SCO-66-1D	EMKA AGENT E (Kit) SML-KIT-EKA-AGE-2D (Kit) SML-KIT-EKA-AGE-1D	Southco Electronic Swinghandle and RFID Card Reader - 13.56 MHz MIFARE® Classic 4k MIFARE Plus® 2k MIFARE® DESFire® 4k & iClass UID/integrated card reader: supports ISO14443 A [13,56 MHz] card types - Wiegand Output protocol
	Dual - High/Low Frequency Reader	Ask your Sales Contact		Southco Electronic Swinghandle and RFID Card Reader - Dual Frequency reader, 125KHz Prox card reader - 13.56 MHz MIFARE® Classic 4k MIFARE Plus® 2k MIFARE® DESFire® 4k & iClass UID/integrated card reader - Wiegand Output protocol
SmartLock ADVANCED	ASK YOUR SALES CONTACT FOR SMARTLOCK ADVANCED OPTIONS AND AVAILABILITY			
<p>Note: All SmartLock Kits contain 2 electronic handles, 1 Intelligent door access sensor and all connecting cables. / 2D Kits: Card authentication on both handles / 1D Kits: 1 handle with card authentication, 1 "slave" handle / Retrofit kits are available for non-standard doors, ask your Raritan sales contact</p>				

Visit [www.raritan.com/smartlock](http://www.raritan.com/smartlock)